




THERMOCOUPLE TECHNOLOGY, INC.

350 New Street, Quakertown, PA 18951
 Phone: 215-529-9394 Fax: 215-529-9397
 www.tteconline.com

SERIES 11000 MISC. HEADS & FITTINGS

STYLE 11004



Brass, Open Terminal

| STYLE | THREAD |
|---------|--------------------|
| 11004-1 | 7/8" - 27 Internal |
| 11004-2 | 1" NPT External |
| 11004-4 | 1/2" NPT Internal |

STYLE 11005, 11006



Molded or Ceramic Open

| STYLE | MAX. AMBIENT |
|-------|--------------|
| 11005 | 300 F |
| 11006 | 1000 F |

STYLE 11007



Aluminum, Closed Miniature

| STYLE | TYPE |
|---------|---------|
| 11007-1 | SIMPLEX |
| 11007-2 | DUPLEX |

Specify tube thread size.


STYLE 1060-32 & 33: Spring Loaded Fitting, 1/2" NPT x 1/2" NPT, Stainless Steel, adjustable.



| PART # | TYPE | Probe Diam. |
|-----------|----------|-------------|
| 1060-32 | Standard | .250" |
| 1060-32-1 | Standard | .188" |
| 1060-33 | Oil-Seal | .250" |
| 1060-33-1 | Oil-Seal | .188" |

Standard Spring Loaded Fittings used to spring load probes into Thermowells.
 Oil Seal Spring Loaded Fittings used to spring load probes into Bearings & seal against splashing oil.

MALE / FEMALE UNION: This space saving union has 1/2" NPT male threads on one side & 1/2" NPT female threads on the other side. Material is Stainless Steel.

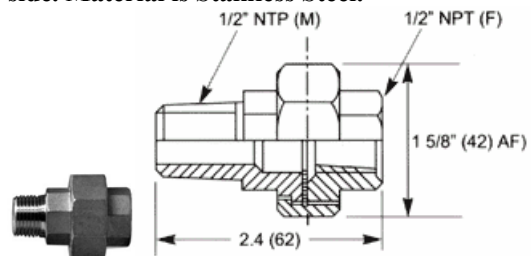

| PART # | THREAD SIZE | OVERALL LENGTH |
|---------|-----------------------|----------------|
| 1060-51 | 1/2" MNPT x 1/2" FNPT | 2.4" |

Other lengths available consult factory.