




THERMOCOUPLE TECHNOLOGY, INC.

350 New Street, Quakertown, PA 18951
 Phone: 215-529-9394 Fax: 215-529-9397
 www.tteconline.com


SERIES 11000 SCREW COVER HEADS

STYLE 11001: Heavy duty, Cast Aluminum, NEMA 4, weatherproof, screw cover with gasket & stainless steel chain, highly polished aluminum finish. Conduit connection: 3/4" NPT.

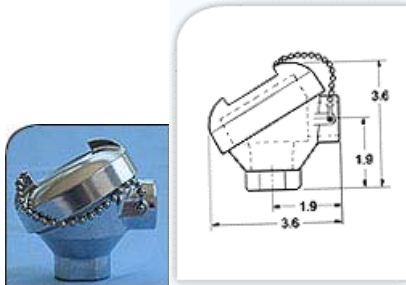

STYLE	MATERIAL	SENSOR
11001-3-A	Cast Alum.	1/2" NPT
11001-3-B	Cast Alum.	3/4" NPT
11001-3-C	Cast Alum.	1" NPT

STYLE 11002: Heavy duty, Cast Iron, NEMA 4, weatherproof, screw cover with gasket & stainless steel chain, rust preventative painted finish. Conduit connection: 3/4" NPT.

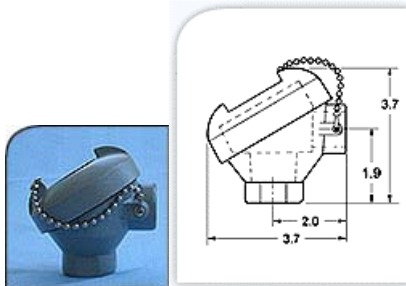


STYLE	MATERIAL	SENSOR
11002-3-A	Cast Iron	1/2" NPT
11002-3-B	Cast Iron	3/4" NPT

STYLE: 11023: FM & CSA Approved Explosion-proof & weatherproof, Cast Aluminum screw cover with gasket & stainless steel chain. Factory Mutual Explosion-proof approval for Class I, Division 1, Groups B, C & D; Dust Ignition-proof for Class II, Division 1, Groups E, F & G. CSA Explosion proof Approval. NEMA 4, 4X Weatherproof. Conduit connection is 3/4" NPT.



STYLE	MATERIAL	SENSOR
11023	Cast Alum.	1/2" NPT

STYLES 11009, 11010: Explosion Proof, NEMA 7 & 9, Class I, Groups B, C, D, Class II, Groups E, F, G, Class III, UL Standard 886.

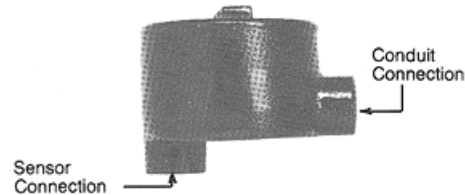

STYLE	MATERIAL	SENSOR & CONDUIT.
11009-3-A	Cast Alum.	1/2" NPT
11009-3-B	Cast Alum.	3/4" NPT
11009-3-C	Cast Alum.	1" NPT
11010-3-A	Cast Iron	1/2" NPT
11010-3-B	Cast Iron	3/4" NPT
11010-3-C	Cast Iron	1" NPT




THERMOCOUPLE TECHNOLOGY, INC.

350 New Street, Quakertown, PA 18951
 Phone: 215-529-9394 Fax: 215-529-9397
 www.tteconline.com


SERIES 11000 SCREW COVER HEADS (continued)

STYLE 11021: Heavy duty, Stainless Steel, NEMA 4X, weatherproof, screw cover with gasket & stainless steel chain, constructed of corrosion resistant 316LSS. Conduit connection 3/4" NPT.

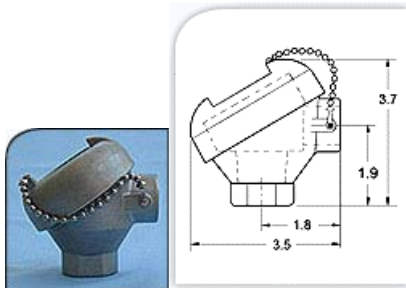


STYLE	MATERIAL	SENSOR
11021-A	316LSS	1/2" NPT
11021-B	316LSS	3/4" NPT

STYLE: 11022: FDA White Screw Cover, NEMA 4X, Weatherproof, Molded from FDA-Approved white Polypropylene & suitable for sanitary applications requiring caustic wash down. Silicone gasket & stainless steel chain. Conduit connection is 3/4" NPT. Maximum temperature rating: 198 F

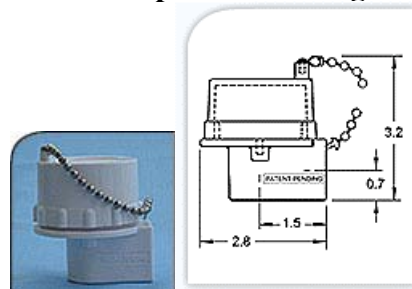


STYLE	MATERIAL	SENSOR
11022	FDA White Polypropylene	1/2" NPT

STYLE 11011, 11012: Miniature, weatherproof with chain. Molded of reinforced thermoset plastic, Includes integral terminal block for simplex or duplex T/C's, 3 or 4 wire RTD's.

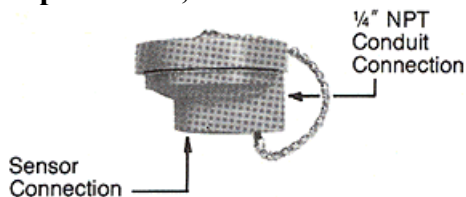

STYLE	SENSOR	MAX. TEMP
11011-A	1/4" NPT	350 F
11011-B	3/8" NPT	350 F
11012-A	1/4" NPT	800 F
11012-B	3/8" NPT	800 F

STYLE 11008: Nylon, non-corrosive, rugged & weather-resistant. UL Listed, 1/2" NPT Sensor x 1/2" NPT Conduit connections, 250 F Maximum temperature rating.

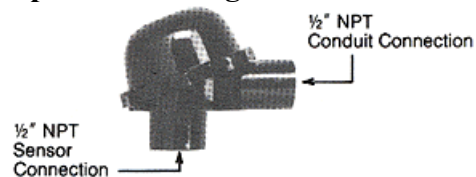

STYLE	DESCRIPTION
11008-0	Head only
11008-2	Head / Simplex block
11008-4	Head / Duplex block
11008-6	Head / Triplex block